

MINIATURE STANDARD SENSITIVITY HALL PROBE

- Very small sensitive area, small physical size.
- Super high precision: $\pm 0.01\%$ max. error at 25 °C*.
- Extremely low thermal drift: $\pm 5\text{ppm}/^\circ\text{C}$ max*.
- Negligible zero drift: ± 0.01 gauss/°C max*.
- Calibration tables at 0, 25 and 50 °C supplied with each probe.

* contribution of probe only.

Specifications of system – MPT-141 with DTM-151 teslameter:

Orientation Transverse, reads positive when field vector enters top epoxy surface
 Field ranges 0.3 0.6 1.2 3.0 tesla full-scale, 3 6 12 30 kilogauss full scale with polarity indication, calibrated to ± 2.2 tesla, $\pm 22,000$ gauss
 Accuracy at 25 °C $\pm(0.01\%$ of reading $+0.006\%$ of full scale) max.

Resolution - DC mode with digital filtering ON:

1 in 600,000 of bipolar span in front panel display.

range	display resolution		serial/GPIB resolution	
	gauss	tesla	gauss	tesla
0.3 tesla	0.01	0.000001	0.001	0.0000001
0.6 tesla	0.02	0.000002	0.01	0.000001
1.2 tesla	0.04	0.000004	0.01	0.000001
3.0 tesla	0.1	0.00001	0.01	0.000001

Resolution - DC mode with digital filtering OFF, and AC mode:


1 in 120,000 of bipolar span in front panel display.

range	display resolution		serial/GPIB resolution	
	gauss	tesla	gauss	tesla
0.3 tesla	0.05	0.000005	0.001	0.0000001
0.6 tesla	0.1	0.00001	0.01	0.000001
1.2 tesla	0.2	0.00002	0.01	0.000001
3.0 tesla	0.5	0.00005	0.01	0.000001

Temperature range 0 to 50 °C operating to spec, -20 to +60 °C max.
 Temperature calibration: $\pm 10\text{ppm}$ of reading/°C max.
 stability -3ppm/°C of reading per meter of probe cable
 zero drift: $\pm(1\mu\text{T} + 0.0003\%$ of full-scale)/°C max.

Probe dimensions overall size: 14 x 5 x 2 mm sensitive area: 1 x 0.5mm
 unshielded part of cable at probe head: 4.5mm diam. 300mm nom. length
 shielded cable: 6.5mm diam.

Order code MPT-141-2s for probe with basic 2 meter shielded cable.
 Special probe cable lengths may be ordered up to 30 meters max.
 Single-range probes: add range suffix -03 -06 -12 -30, e.g. MPT-141-03-2s.

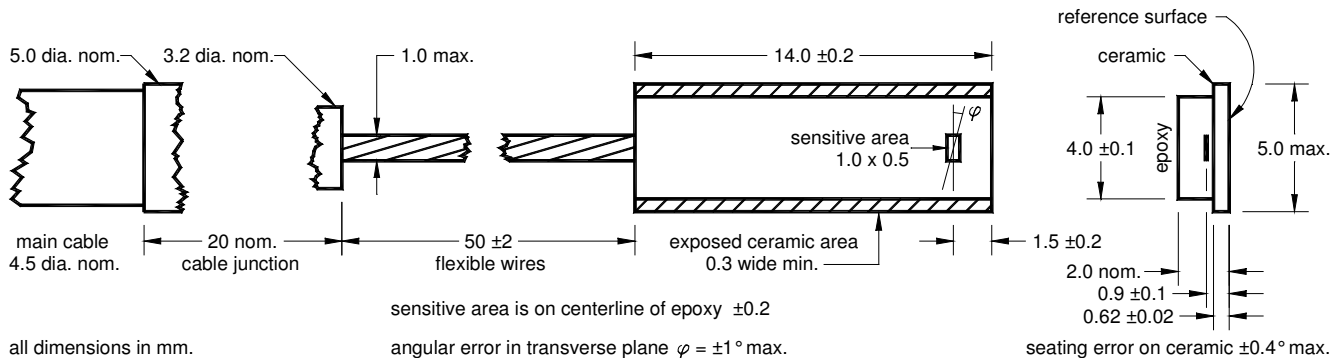

Group3 reserves the right to change specifications at any time without notice,